


for
Versatile Applications.

High stability type.
Pressure conduit type.
Airtight structure.
All stainless steel made.

Plug & Play
with built-in TEDS

With the TD series indicators, equivalent
input calibration, likely to forget in manual
setting, can be performed automatically
and help prevetion.

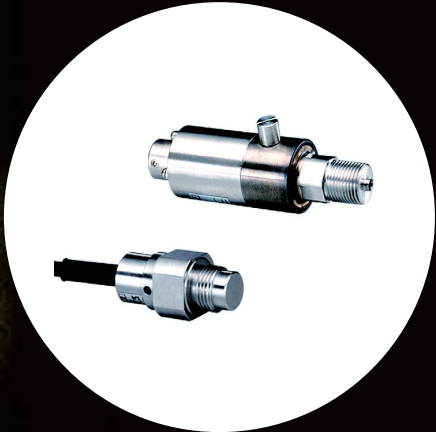


Specifications

Type	Pressure Transducer								
Model	TP-AR(T) TEDS RoHS (10 substances)								
Rated Capacity (R.C.)	500kPa	1MPa	2MPa	5MPa	10MPa	20MPa	30MPa	50MPa	100MPa
Rated Output (R.O.)	0.75mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V
Natural Frequency	17kHz	17kHz	19kHz	34kHz	39kHz	68kHz	70kHz	104kHz	100kHz
Weight (Approx.)	220g	220g	220g	220g	220g	300g	300g	300g	400g
Safe overload rating	150% R.C.								
Linearity	0.2% R.O.								
Hysterisis	0.2% R.O.								
Repeatability	0.3% R.O.								
Safe Excitation Voltage	10V								
Input Terminal Resistance	400Ω ±60Ω								
Output Terminal Resistance	350Ω ±3.5Ω								
Insulation Resistance	1000MΩ or more (DC50V)								
Compensated Temperature Range	-10°C to 60°C								
Permissible Temperature Range	-20 to 80°C								
Temperature Effect on Zero Balance	0.2% R.O. / 10°C								
Temperature Effect on Output	0.2% R.C. / 10°C								
Connector	Receptacle (NDIS)								
Cable	Sold separately								
Mounting screw	G3/8 (PF 3/8)								G1/2 (PF1/2)
Body Material	Stainless Steel								
Dimensional drawings (Units: mm) 500k to 10MPa 20M to 50MPa 100MPa									

Company names, product names and logos in this document are the trademarks or registered trademarks of their respective holders.

Specifications

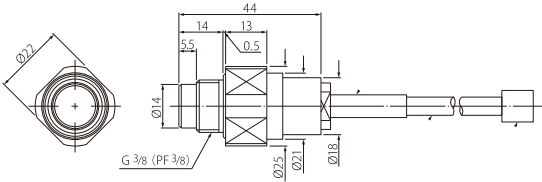	Pressure (flush diaphragm)					
Type	TP-BR(T) TEDS RoHS					
Rated Capacity (R.C.)	1MPa	2MPa	5MPa	10MPa	20MPa	50MPa
Rated Output (R.O.)	1mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V	1.5mV/V
Natural Frequency	26kHz	37kHz	56kHz	80kHz	100kHz	170kHz
Weight (Approx.)	120g	120g	120g	120g	120g	120g
Safe overload rating	150 % R.C.					
Linearity	0.5 % R.O.					
Hysteresis	0.5 % R.O.					
Repeatability	0.5 % R.O.					
Safe Excitation Voltage	6V					
Input Terminal Resistance	350Ω ±3.5Ω					
Output Terminal Resistance	350Ω ±3.5Ω					
Insulation Resistance	1000MΩ (DC50V)					
Compensated Temperature Range	-10℃ ~ 60℃					
Permissible Temperature Range	-10 ~ 60℃					
Temperature Effect on Zero Balance	0.8 % R.O. / 10℃					
Temperature Effect on Output	0.8 % R.C. / 10℃					
Connector	Receptacle (NDIS)					
Cable	Ø6mm 4-core shielded cable 0.3 m direct connection with NDI7J					
Mountingscrew	G 3/8 (PF 3/8)					
Body Material	Stainless Steel					
Dimensional drawings (Units: mm)						

Company names, product names and logos in this document are the trademarks or registered trademarks of their respective holders.